



12V 5AMP / 24V 2.5AMP
SELECTABLE CHARGER & MAINTAINER



5 AMP MOUNTABLE BATTERY CHARGER AND MAINTAINER



P/N: 022-0258-DL-WH

ULTRA PERFORMANCE FOR MOST BATTERIES

Connect It and Forget It

Once connected, this Battery Tender® Battery Charger will charge and maintain your battery so that it is always ready to go when you are. It's lightweight, fully automatic, and easy to use.

WHAT'S IN THE BOX?



3/YEAR
WARRANTY

START WITH TRUST
MOST RELIABLE & TRUSTED CHARGER
SINCE 1965

SPECIFICATIONS

- Input: 120V - 50/60Hz
- Output: 12V @ 5 Amps, and 24V @ 2.5 Amps
- 6 ft. AC Power Cord and 4.5 ft. DC Power Cord
- Size: 7.5" X 5.5" X 1.75" (L X W X H)
- Unit Weight: 3.8 lbs. (Charger Only)
- Weatherproof

// INDUSTRIAL // AUTOMOTIVE // MARINE
24V / 2.5 AMP - 12V / 5 AMP
Charges & Maintains Industrial, Automotive and Marine Batteries at Optimal Charge



BATTERYTENDER.COM

Tb Plus

P/N: 022-0258-DL-WH

Replaced Discontinued Items:
022-0157-1 & 022-0158-1



CHARGE LEAD AND LITHIUM BATTERIES





Tb Plus[®]


OLD vs. NEW

OLD

NEW


12V 5AMP

022-0157

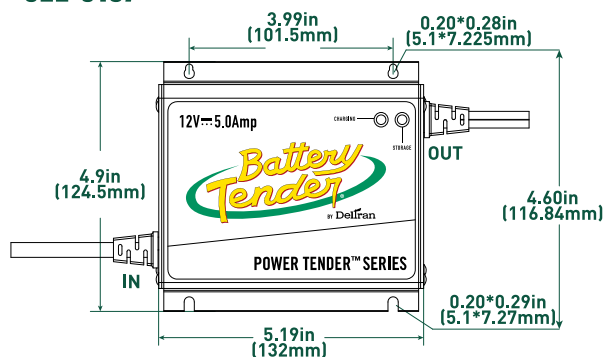



24V 2.5AMP

022-0158

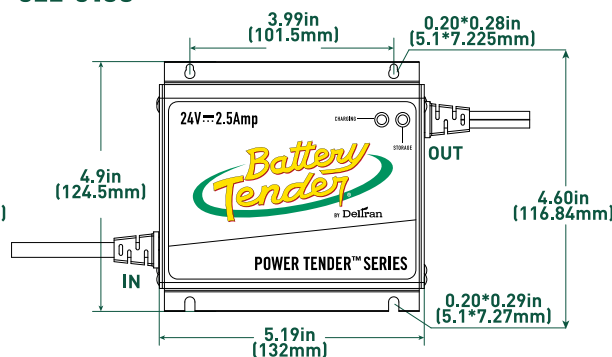


12V 5 AMP / 24V 2.5 AMP

022-0258

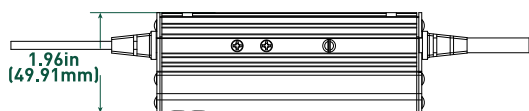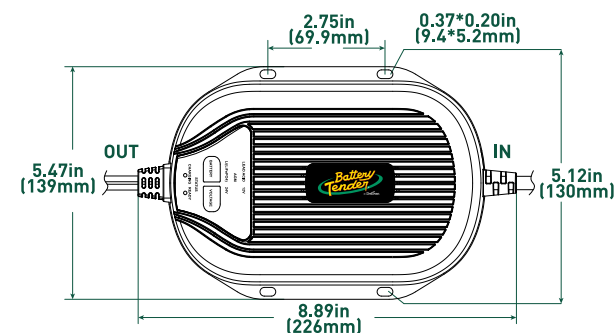

Weight: 3.049lb (1383g)

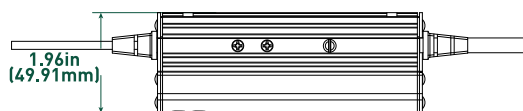

Weight: 3.049lb (1383g)



Weight: 3.10lb (1406g)

	022-0157	022-0158	022-0258
Output Voltage Selection	12V Only	24V Only	12V & 24V Selectable
Input Voltage	120 VAC	120 VAC	120 VAC
Battery Chemistry Selection	None	None	AGM, Lead Acid & Lithium (12V) Selectable
Certification	FCC, CEC, cULus and ICES	FCC, CEC, cULus and ICES	FCC, CEC, cETLus, ICES, DOE
IP Rating	IP67 Equivalent	IP67 Equivalent	IP67
Warranty	2 Years	2 Years	2 Years
Input Cable	6 ft-18 AWG	6 ft-18 AWG	6 ft-18 AWG
Output Cable	4.5 ft- 16 AWG	4.5 ft- 16 AWG	4.5 ft- 16 AWG
Ring Terminal Harness	1.5 ft	1.5 ft	1.5 ft

*These units will be discontinued as of January 2020. They will only be available through special order with a 500 MOQ.